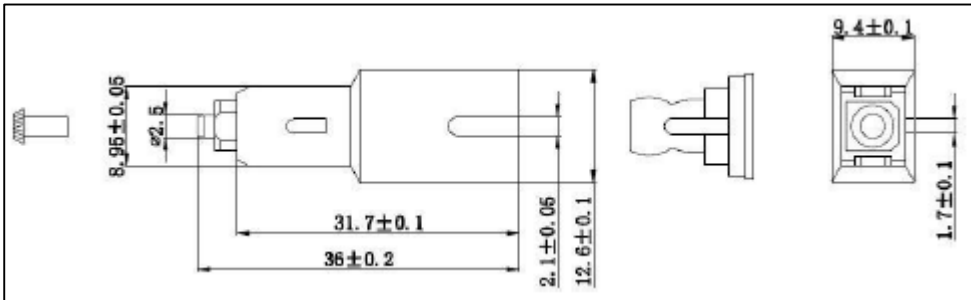


RF_35/05.10/6.0 RQ_424.15 Rev.02 10/01/13

Techinal datasheet		EN	Rosenberger	
Optical attenuator SC, xxdB, male/female			1437X2YYMF	
Drawing				
				
Specifications				
Fiber type	Monomode			
Color	SC/UPC – blue SC/APC - green			
Attenuation	xxdB ± 1dB			
Return Loss	≥ 60 dB (Polish APC) ≥ 50 dB (Polish UPC)			
Wavelength	1260nm ~1640nm			
Operating temperature	-40 ~ +75°C			
Storage temperature	-40 ~ +75°C			
Vibration loss	≤ 0.2 dB			
Max. Power	0,5 W			
Attenuation range	1 ~ 30 dB			
Characteristics				
Telecommunications Applications				
Local Area Network				
FTTH and FTTX				
DWDM Applications				
Test & Measurement				
Elab.		Dat.		Aprov.
Lucas R.		11/06/2021		Gabriel C.
				Rev.
				00.
Rosenberger Domex Telecomunicações Ltda. Avenida Cabletech, 601 – Guamirim – Brasil www.rosenbergerdomex.com.br			Tel. : +55 (012) 3221 8500 Fax : +55 (012) 3221 8543 E-mail : vendas@rdt.com.br	Página 1/1