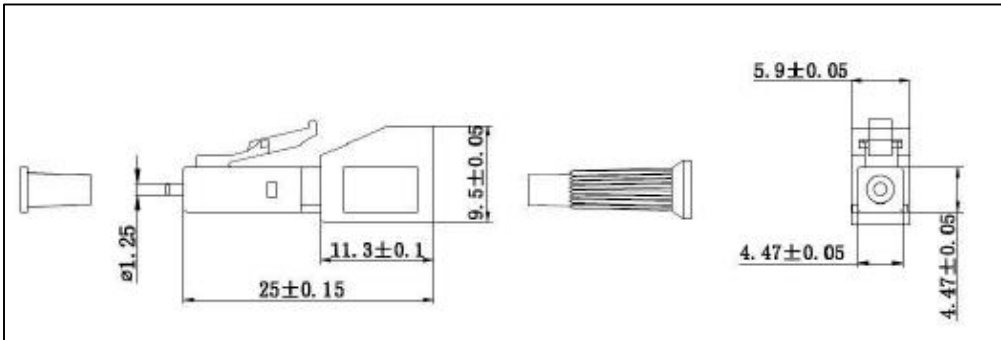


RF_35/05.10/6.0 RQ_424.15 Rev.02 10/01/13

Techinal datasheet		EN	Rosenberger	
Optical attenuator LC, xxdB, male/female			143LX2YYMF	
Drawing				
				
Specifications				
Fiber type		Monomode		
Color		LC/UPC – blue LC/APC - green		
Attenuation		xxdB ± 1dB		
Return Loss		≥ 60 dB (Polish APC) ≥ 50 dB (Polish UPC)		
Wavelength		1260nm ~1640nm		
Operating temperature		-40 ~ +75°C		
Storage temperature		-40 ~ +75°C		
Vibration loss		≤ 0.2 dB		
Max. Power		0,5 W		
Attenuation range		1 ~ 30 dB		
Characteristics				
Telecommunications Applications				
Local Area Network				
FTTH and FTTX				
DWDM Applications				
Test & Measurement				
Elab.		Dat.	Aprov.	Rev.
Lucas R.		11/06/2021	Gabriel C.	00.
Rosenberger Domex Telecomunicações Ltda. Avenida Cabletech, 601 – Guamirim – Brasil www.rosenbergerdomex.com.br			Tel. : +55 (012) 3221 8500 Fax : +55 (012) 3221 8543 E-mail : vendas@rdt.com.br	Página 1/1